




ECS-200/210/220/230/240/250P Poly-crystalline PV Module

Features

- € High conversion efficiency through advanced manufacturing technology
- € Excellent performance under weak light conditions (mornings, evenings and cloudy days)
- € Withstand snow loads up to 5400 Pa and wind loads up to 2400 Pa under extreme temperature
- € 10 years product warranty and 25 years performance warranty ensure reliability of modules
- € Easy installation

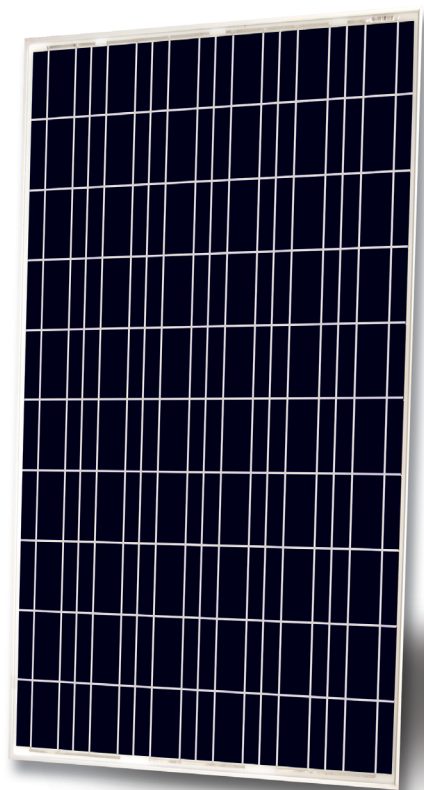

Certificates

- € Manufactured according to International Quality Management System Standard: ISO 9001
- € Certified and approved by CE, TUV, IEC 61215, IEC 61730, MCS, CEC and PV CYCLE




Electrical Characteristics under STC*

Module Type	ECS-200P	ECS-210P	ECS-220P	ECS-230P	ECS-240P	ECS-250P
Maximum Power-P _{max} (Wp)	200	210	220	230	240	250
Voltage at Maximum Power-V _{mp} (V)	28.8	29	29.2	29.4	29.6	29.8
Current at Maximum Power -I _{mp} (A)	6.94	7.24	7.53	7.82	8.11	8.39
Open Circuit Voltage Voc (V)	36.4	36.7	37	37.2	37.4	37.6
Short Circuit Current-I _{sc} (A)	7.31	7.61	7.92	8.19	8.48	8.76
Module Efficiency- η_m (%)	12.3	12.9	13.5	14.1	14.8	15.4
Power Tolerance (%)	0/+3	0/+3	0/+3	0/+3	0/+3	0/+3

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156 mm (6 inches)
Number of Cells	60 (6×10)
Dimension	1640×992×40mm (64.57×39.06×1.57 inches)
Weight	20.0 kg
Front Glass	Low Iron Tempered Glass
Encapsulant	EVA
Frame	Anodized Aluminum Alloy

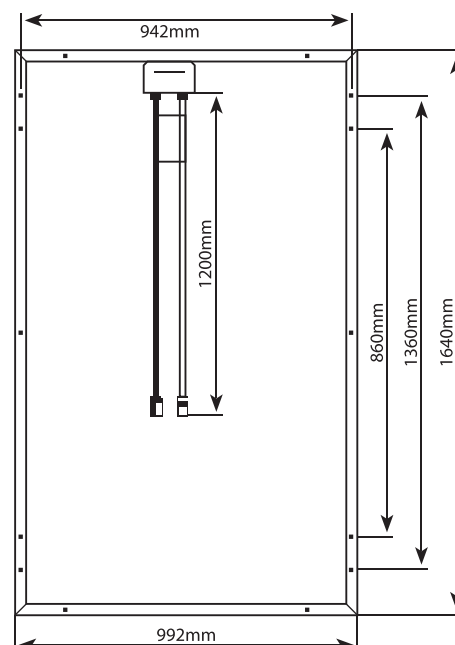

Temperature Characteristics

NOCT*	45±2°C
Temperature Coefficient of P _{max}	-0.50%/°C
Temperature Coefficient of Voc	-0.35%/°C
Temperature Coefficient of I _{sc}	0.060%/°C

Maximum System Ratings


Operating Temperature	-40°C to +80°C
Maximum System Voltage	1000V DC
Maximum Series Fuse Rating	10A

Warranty

10 years product warranty

10 years warranty on 90% power output

25 years warranty on 80% power output

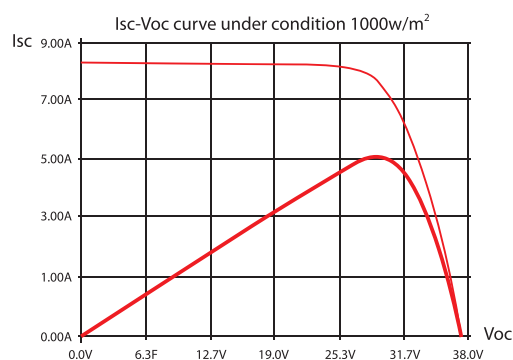

*STC (Standard Testing Conditions): Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5

*NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

The specifications in this datasheet are subjected to change without prior notice