


Tiger Mono-facial All Black 375-395 Watt

Tiling Ribbon (TR) Technology

Positive power tolerance of 0~+3%

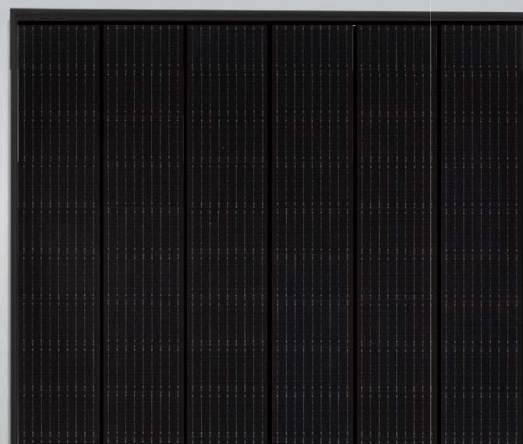

KEY FEATURES



TR technology + Half Cell

TR technology with Half cell aims to eliminate the cell gap to increase module efficiency (mono-facial up to 20.69%)



9BB instead of 5BB

9BB technology decreases the distance between bus bars and finger grid line which is benefit to power increase.



Higher lifetime Power Yield

2.5% first year degradation,
0.6% linear degradation



Best Warranty

12 year product warranty,
25 year linear power warranty



Avoid debris, cracks and broken gate risk effectively


9BB technology using circular ribbon that could avoid debris, cracks and broken gate risk effectively




- ISO9001:2015, ISO14001:2015, OHSAS18001 certified factory
- IEC61215, IEC61730 certified product

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty 25 Year Linear Power Warranty
0.6% Annual Degradation Over 25 years

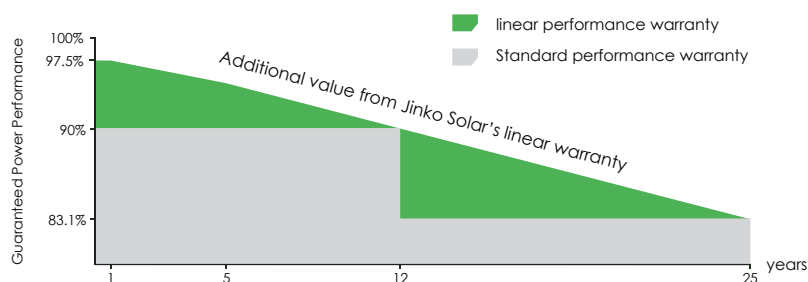

Engineering Drawings

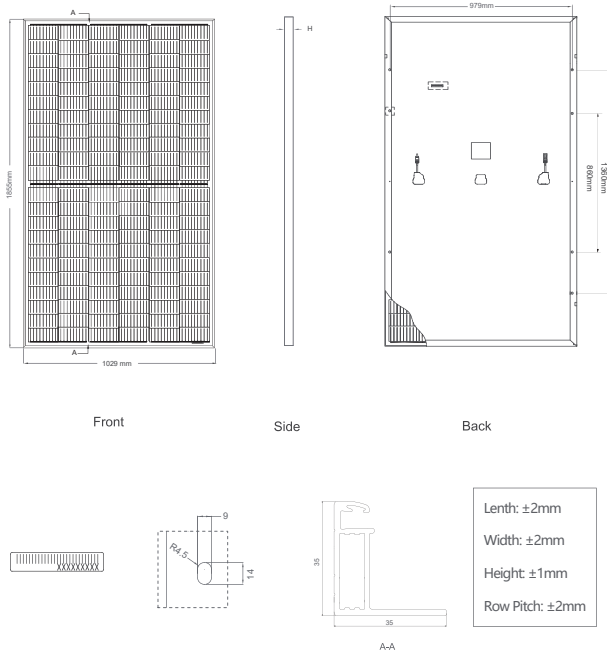


Packaging Configuration

(Two pallets = One stack)

30pcs/pallets, 60pcs/stack, 720pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

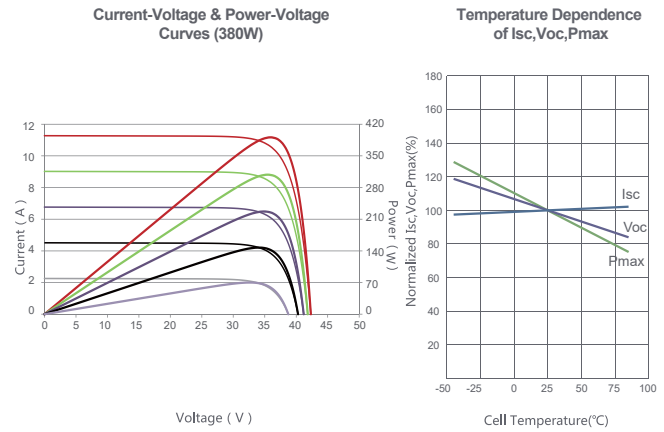

Mechanical Characteristics

Cell Type	P type Mono-crystalline
No. of cells	132 (2×66)
Dimensions	1855×1029×35mm (73.03×40.51×1.37 inch)
Weight	21.3 kg (46.96 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TUV 1×4.0mm ² (+): 290mm, (-): 145 mm or Customized Length

SPECIFICATIONS

Module Type	JKM375M-6RL3-B		JKM380M-6RL3-B		JKM385M-6RL3-B		JKM390M-6RL3-B		JKM395M-6RL3-B	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	375Wp	279Wp	380Wp	283Wp	385Wp	286Wp	390Wp	290Wp	395Wp	294Wp
Maximum Power Voltage (Vmp)	36.20V	32.90V	36.30V	32.97V	36.39V	33.08V	36.49V	33.18V	36.58V	33.27V
Maximum Power Current (Imp)	10.36A	8.48A	10.47A	8.57A	10.58A	8.66A	10.69A	8.75A	10.80A	8.83A
Open-circuit Voltage (Voc)	42.83V	40.34V	42.93V	40.43V	43.03V	40.53V	43.13V	40.62V	43.23V	40.72V
Short-circuit Current (Isc)	11.25A	9.09A	11.36A	9.18A	11.47A	9.26A	11.58A	9.35A	11.69A	9.44A
Module Efficiency STC (%)	19.65%		19.91%		20.17%		20.43%		20.69%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC (IEC)									
Maximum series fuse rating	20A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.35%/°C									
Temperature coefficients of Voc	-0.28%/°C									
Temperature coefficients of Isc	0.048%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

* STC: Irradiance 1000W/m² Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%

The company reserves the final right for explanation on any of the information presented hereby. TR JKM375-395M-6RL3-B-D4-EN